

## DS-2CE16D0T-EXIF 2 MP Fixed Mini Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

## ▪ Specification

| Camera                   |                                                                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                    | DS-2CE16D0T-EXIF                                                                                                                                    |
| Product Name             | 2MP Outdoor EXIR Fixed Mini Bullet Camera                                                                                                           |
| Image Sensor             | 2 MP CMOS                                                                                                                                           |
| Signal System            | PAL/NTSC                                                                                                                                            |
| Resolution               | 1920 (H) × 1080 (V)                                                                                                                                 |
| Frame Rate               | TVI: 1080p@25fps/30fps<br>AHD: 1080p@25fps/30fps<br>CVI: 1080p@25fps/30fps<br>CVBS: PAL/NTSC                                                        |
| Min. Illumination        | 0.02 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                                                            |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s                                                                                               |
| Lens                     | 2.8 mm, 3.6 mm Fixed Lens                                                                                                                           |
| Field of View            | 2.8 mm, horizontal FOV: 96.5°, vertical FOV: 48.9°, diagonal FOV: 120.5°<br>3.6 mm, horizontal FOV: 76.9°, vertical FOV: 40.6°, diagonal FOV: 92.0° |
| Lens Mount               | M12                                                                                                                                                 |
| Day & Night              | IR Cut Filter                                                                                                                                       |
| WDR (Wide Dynamic Range) | Digital WDR                                                                                                                                         |
| Angle Adjustment         | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°                                                                                              |
| Image                    |                                                                                                                                                     |
| Image Mode               | STD/HIGH-SAT                                                                                                                                        |
| AGC                      | Yes                                                                                                                                                 |
| Day/Night Mode           | Auto/Color/BW (Black and White)                                                                                                                     |
| White Balance            | Auto                                                                                                                                                |
| AE (Auto Exposure) Mode  | DWDR, BLC, Global                                                                                                                                   |
| Noise Reduction          | 2D DNR                                                                                                                                              |
| Language                 | English                                                                                                                                             |
| Function                 | Brightness, Mirror, Smart IR, Sharpness                                                                                                             |
| Interface                |                                                                                                                                                     |
| Video Output             | Switchable TVI/AHD/CVI/CVBS                                                                                                                         |
| General                  |                                                                                                                                                     |
| Operating Conditions     | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)                                                                              |
| Power Supply             | 12 VDC ± 25%                                                                                                                                        |
| Consumption              | Max. 3.3 W                                                                                                                                          |
| Protection Level         | IP67                                                                                                                                                |
| Material                 | Metal                                                                                                                                               |
| IR Range                 | Up to 20 m                                                                                                                                          |
| Communication            | HIKVISION-C                                                                                                                                         |
| Dimension                | 138.8 mm × 60.9 mm × 57.9 mm (5.465" × 2.389" 2.278")                                                                                               |
| Weight                   | Approx. 260 g (0.57 lb.)                                                                                                                            |

## ▪ Available Model

DS-2CE16D0T-EXIF(2.8mm)


DS-2CE16D0T-EXIF(3.6mm)

DS-2CE16D0T-EXIF(2.8mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(MENA)

DS-2CE16D0T-EXIF(3.6mm)(Chicony)

## ▪ Dimension

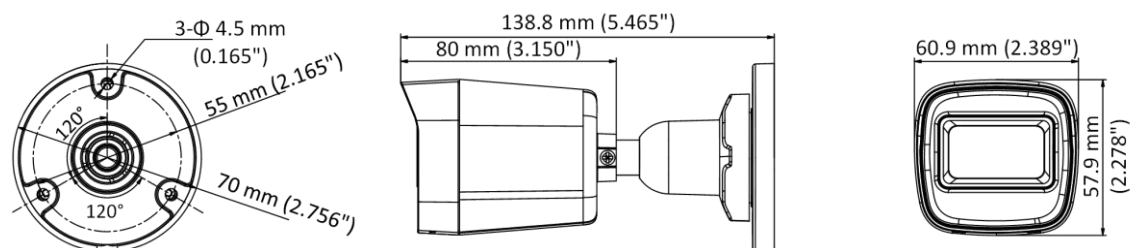

## ▪ Accessory

### ▪ Optional

**DS-1280ZJ-XS  
Junction Box**





**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq